




Bulletin T30-TTM-DFK-2

TTM Two-Way Medium Profile Evaporators

60 Hz

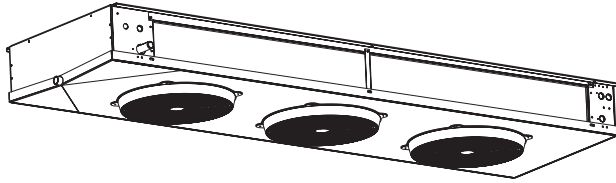

DEFROST KIT & FUSE PACKAGE SELECTIONS

 **PRODUCT SUPPORT**
 web: www.t-rp.com/ttm
 email: evaps@t-rp.com
 call: 1-844-893-3222 x520



For info on matched Trenton condensing units, visit www.t-rp.com/cu

Defrost Kit & Fuse Package Online Selection Tool:
www.t-rp.com/dfk



INCLUDES MODELS FOR DOE & NRCAN **AWEF-COMPLIANT APPLICATIONS**

see Generation D Models - Page 2




INCLUDES MODELS FOR DOE & NRCAN **AWEF-EXEMPT APPLICATIONS**

see Legacy Models - Page 3

Defrost Kits and Fuse Package Part Numbers and Descriptions Pages 4-5

DEFROST KIT AND FUSE PACKAGE SELECTIONS

TTM TWO-WAY MEDIUM PROFILE EVAPORATORS (GENERATION D MODELS)

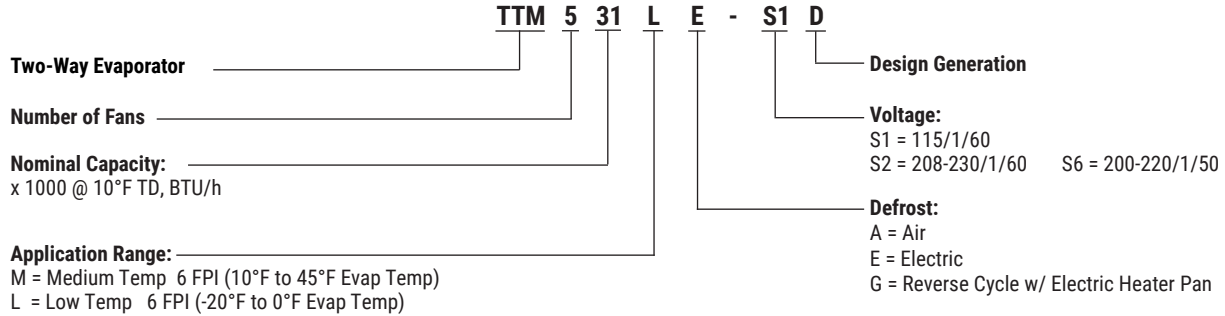

Medium Temperature


TEMP	FPI	# of Fans	Model TTM	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
MEDIUM	6	2	207ME-S1D	115/1/60	DFK-01	FP-001	DFK-05	FP-004
			207ME-S2D	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008
		209ME-S1D	115/1/60	DFK-01	FP-002	DFK-05	FP-006	
		209ME-S2D	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008	
		215ME-S2D	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008	
		313ME-S1D	115/1/60	DFK-01	FP-003	DFK-05	FP-007	
	3	313ME-S2D	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008	
		318ME-S2D	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	
		321ME-S2D	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	
		426ME-S2D	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	
	5	531ME-S2D	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	

Low Temperature

TEMP	FPI	# of Fans	Model TTM	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
LOW	6	2	204LE-S1D	115/1/60	DFK-01	FP-001	DFK-05	FP-004
			204LE-S2D	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008
		206LE-S1D	115/1/60	DFK-01	FP-002	DFK-05	FP-006	
		206LE-S2D	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008	
		212LE-S2D	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008	
		309LE-S1D	115/1/60	DFK-01	FP-003	DFK-05	FP-007	
	3	309LE-S2D	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008	
		315LE-S2D	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	
		318LE-S2D	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	
		422LE-S2D	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	
	5	526LE-S2D	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	

DEFROST KIT AND FUSE PACKAGE SELECTIONS

TTM TWO-WAY MEDIUM PROFILE EVAPORATORS (LEGACY MODELS)

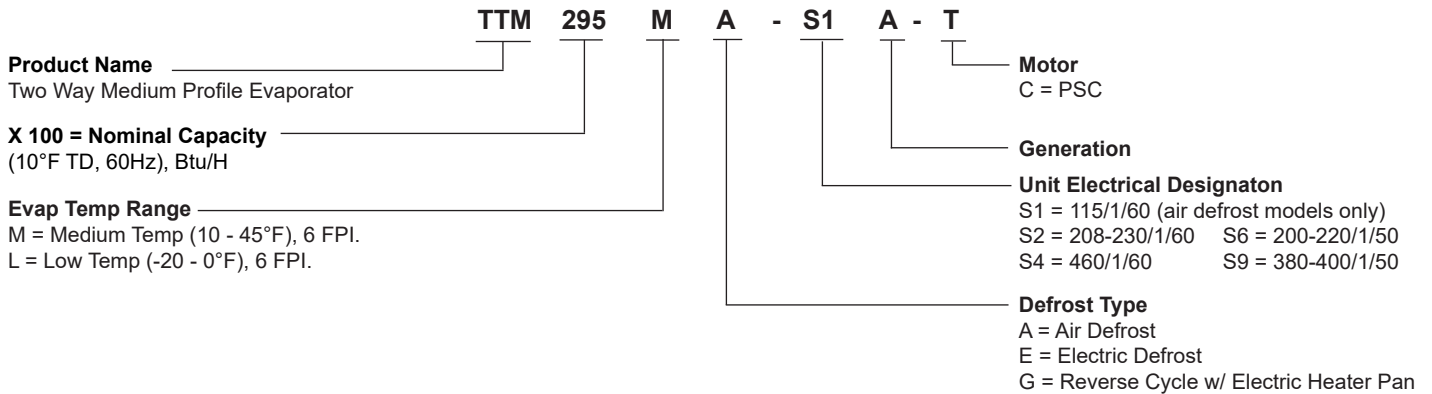

Models with Standard PSC Motors

Medium Temperature, 6 FPI, with standard PSC Motors

TEMP	FPI	# of Fans	Model TTM	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
ME - MEDIUM	6	2	115ME-S2A-C	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008
			139ME-S2A-C	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008
		3	172ME-S2A-C	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010
			208ME-S2A-C	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010
			4	236ME-S2A-C	208-230/1/60	DFK-02	FP-007	DFK-06
	260ME-S2A-C	208-230/1/60		DFK-02	FP-007	DFK-06	FP-010	
	5	295ME-S2A-C	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	

Low Temperature, 6 FPI, with standard PSC Motors

TEMP	FPI	# of Fans	Model TTM	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
LE - LOW	6	2	105LE-S2A-C	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008
			124LE-S2A-C	208-230/1/60	DFK-02	FP-004	DFK-06	FP-008
		3	153LE-S2A-C	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010
			188LE-S2A-C	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010
		4	210LE-S2A-C	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010
			235LE-S2A-C	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010
	5	265LE-S2A-C	208-230/1/60	DFK-02	FP-007	DFK-06	FP-010	

DEFROST KIT DETAILS

Defrost Kits

Number of Evaps.	Kit Part Number	Description
1	DFK-01	Time Clock, HtrCont - 1x 40A (3P), FB 1x 30A (1P)
1	DFK-02	Time Clock, HtrCont - 1x 40A (3P), FB 1x 30A (2P)
1	DFK-03	Time Clock, HtrCont - 1x 40A (3P), FB 1x 30A (3P)
1	DFK-04	Time Clock, HtrCont - 1x 40A (3P), FB 1x 60A (2P)
2	DFK-05	Time Clock, HtrCont - 1x 40A (3P), FB 2x 30A (1P)
2	DFK-06	Time Clock, HtrCont - 1x 40A (3P), FB 2x 30A (2P)
2	DFK-07	Time Clock, HtrCont - 1x 40A (3P), FB 2x 30A (3P)
2	DFK-08	Time Clock, HtrCont - 1x 50A (3P), FB 2x 60A (2P)
2	DFK-09	Time Clock, HtrCont - 1x 50A (3P), FB 2x 30A (2P)
1	DFK-10	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P)
1	DFK-11	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P)
2	DFK-12	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 4x 30A (2P)
2	DFK-13	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 4x 30A (3P)
1	DFK-14	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 30A (3P)
1	DFK-15	Time Clock, HtrCont - 1x40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 60A (2P)
1	DFK-16	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 60A (3P)
1	DFK-17	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 1x 60A (3P)
2	DFK-18	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 30A (3P)
2	DFK-19	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 4x 30A (2P)
2	DFK-20	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 4x 30A (3P)
1	DFK-21	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 60A (2P)
1	DFK-22	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 1x 60A (3P)
2	DFK-23	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 30A (3P)
2	DFK-24	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 2x 60A (3P)
1	DFK-25	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 2x 60A (2P)
1	DFK-26	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 2x 60A (3P)
2	DFK-27	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 60A (2P)
2	DFK-28	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 60A (3P)
2	DFK-29	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 2x 60A (3P)
2	DFK-30	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 50A (3P), FB 2x 30A (2P), FB 2x 60A (3P)
1	DFK-31	Time Clock, HtrCont - 2x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 2x 60A (3P)
2	DFK-32	Time Clock, HtrCont - 2x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 60A (2P)
2	DFK-33	Time Clock, HtrCont - 2x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 2x 60A (3P)
2	DFK-34	Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 4x 60A (2P)
2	DFK-35	Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 4x 60A (3P)
2	DFK-36	Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 50A (3P), FB 2x 30A (2P), FB 4x 60A (2P)
2	DFK-37	Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 50A (3P), FB 2x 30A (3P), FB 4x 60A (3P)
2	DFK-38	Time Clock, HtrCont - 4x 50A (3P), FanCont - 1x 50A (3P), FB 2x 30A (3P), FB 4x 60A (3P)
1	DFK-39	Time Clock, HtrCont1 - 1x 40A (3P), HtrCont2 - 2x 50A (3P), FanCont - 1x 40A (3P), FB 4x 60A (3P)

NOTE: HtrCont = Heater Contactor, FanCont = Fan Contactor, FB = Fuse Block, (1P), (2P), (3P) = Number of Poles

FUSE PACKAGE DETAILS

Fuse Packages

Package Part Number	Description
FP-001	FUSES (1) 15AMP
FP-002	FUSES (1) 20AMP
FP-003	FUSES (1) 25AMP
FP-004	FUSES (2) 15AMP
FP-006	FUSES (2) 20AMP
FP-007	FUSES (2) 25AMP
FP-008	FUSES (4) 15AMP
FP-010	FUSES (4) 25AMP
FP-012	FUSES (2) 35AMP
FP-013	FUSES (3) 15AMP
FP-014	FUSES (3) 20AMP
FP-015	FUSES (4) 20AMP
FP-016	FUSES (4) 20AMP (6) 45AMP
FP-017	FUSES (4) 35AMP
FP-018	FUSES (6) 15AMP
FP-019	FUSES (6) 20AMP
FP-020	FUSES (2) 30AMP
FP-021	FUSES (4) 30AMP
FP-022	FUSES (8) 15AMP
FP-023	FUSES (2) 25AMP (3) 50AMP
FP-024	FUSES (2) 20AMP (3) 45AMP
FP-025	FUSES (6) 20AMP (6) 60AMP
FP-026	FUSES (6) 15AMP (12) 40AMP
FP-027	FUSES (6) 15AMP (6) 40AMP
FP-028	FUSES (6) 20AMP (12) 40AMP
FP-029	FUSES (6) 15AMP (6) 50AMP
FP-030	FUSES (6) 15AMP (6) 45AMP
FP-031	FUSES (6) 15AMP (6) 35AMP
FP-032	FUSES (6) 15AMP (6) 30AMP
FP-033	FUSES (6) 25AMP (12) 50AMP
FP-034	FUSES (6) 20AMP (12) 35AMP
FP-035	FUSES (4) 25AMP (6) 50AMP
FP-036	FUSES (6) 25AMP (12) 60AMP
FP-037	FUSES (6) 20AMP (12) 60AMP
FP-038	FUSES (6) 20AMP (12) 50AMP
FP-039	FUSES (6) 20AMP (12) 45AMP
FP-040	FUSES (6) 15AMP (12) 45AMP
FP-041	FUSES (5) 15AMP
FP-042	FUSES (10) 15AMP
FP-043	FUSES (3) 25AMP (6) 60AMP
FP-044	FUSES (3) 20AMP (6) 60AMP
FP-045	FUSES (3) 20AMP (6) 50AMP
FP-046	FUSES (3) 25AMP (6) 45AMP
FP-047	FUSES (3) 15AMP (6) 45AMP
FP-048	FUSES (4) 15AMP (4) 45AMP
FP-049	FUSES (4) 15AMP (4) 40AMP
FP-050	FUSES (3) 15AMP (3) 60AMP
FP-051	FUSES (4) 20AMP (6) 50AMP
FP-052	FUSES (4) 15AMP (6) 45AMP
FP-053	FUSES (4) 15AMP (6) 30AMP
FP-054	FUSES (3) 15AMP (6) 35AMP
FP-055	FUSES (2) 15AMP (2) 45AMP
FP-056	FUSES (2) 15AMP (2) 40AMP
FP-057	FUSES (2) 20AMP (3) 50AMP
FP-058	FUSES (2) 15AMP (3) 45AMP
FP-059	FUSES (2) 15AMP (3) 30AMP
FP-060	FUSES (2) 15AMP (2) 35AMP
FP-061	FUSES (2) 15AMP (2) 50AMP
FP-062	FUSES (2) 15AMP (2) 60AMP
FP-063	FUSES (2) 15AMP (3) 25AMP
FP-064	FUSES (2) 15AMP (3) 35AMP
FP-065	FUSES (2) 15AMP (3) 40AMP

Package Part Number	Description
FP-066	FUSES (2) 15AMP (3) 20AMP
FP-067	FUSES (4) 15AMP (4) 35AMP
FP-068	FUSES (4) 15AMP (4) 50AMP
FP-069	FUSES (4) 15AMP (4) 60AMP
FP-070	FUSES (4) 15AMP (6) 25AMP
FP-071	FUSES (4) 15AMP (6) 35AMP
FP-072	FUSES (4) 15AMP (6) 40AMP
FP-073	FUSES (4) 15AMP (6) 20AMP
FP-074	FUSES (3) 20AMP (3) 60AMP
FP-075	FUSES (3) 20AMP (6) 35AMP
FP-076	FUSES (3) 25AMP (6) 50AMP
FP-077	FUSES (3) 35AMP (9) 45AMP
FP-078	FUSES (3) 15AMP (3) 35AMP
FP-079	FUSES (3) 15AMP (3) 45AMP
FP-080	FUSES (3) 15AMP (3) 50AMP
FP-081	FUSES (3) 20AMP (6) 40AMP
FP-082	FUSES (3) 15AMP (3) 40AMP
FP-083	FUSES (3) 15AMP (6) 40AMP
FP-084	FUSES (6) 15AMP (6) 60AMP
FP-085	FUSES (6) 15AMP (12) 35AMP
FP-086	FUSES (3) 35AMP (3) 45AMP (6) 60AMP
FP-087	FUSES (4) 20AMP (4) 40AMP (4) 50AMP
FP-088	FUSES (4) 15AMP (4) 35AMP (4) 40AMP
FP-089	FUSES (2) 20AMP (2) 40AMP (2) 50AMP
FP-090	FUSES (2) 15AMP (2) 35AMP (2) 40AMP
FP-091	FUSES (2) 20AMP (2) 35AMP (2) 40AMP
FP-092	FUSES (2) 25AMP (2) 40AMP (2) 50AMP
FP-093	FUSES (4) 20AMP (4) 35AMP (4) 40AMP
FP-094	FUSES (6) 15AMP (6) 25AMP
FP-095	FUSES (3) 15AMP (3) 25AMP
FP-096	FUSES (3) 15AMP (3) 30AMP
FP-097	FUSES (4) 15AMP (4) 30AMP
FP-098	FUSES (4) 15AMP (4) 25AMP
FP-099	FUSES (4) 15AMP (4) 20AMP
FP-100	FUSES (2) 15AMP (2) 20AMP
FP-101	FUSES (2) 15AMP (2) 25AMP
FP-102	FUSES (2) 15AMP (2) 30AMP
FP-103	FUSES (4) 25AMP (4) 40AMP (4) 50AMP
FP-104	FUSES (7) 45AMP (5) 15AMP
FP-105	FUSES (2) 20AMP (2) 30AMP
FP-106	FUSES (2) 20AMP (2) 35AMP
FP-107	FUSES (2) 20AMP (2) 50AMP
FP-108	FUSES (2) 20AMP (2) 60AMP
FP-109	FUSES (2) 20AMP (2) 35AMP (2) 40AMP
FP-110	FUSES (2) 20AMP (3) 15AMP
FP-111	FUSES (5) 20AMP
FP-112	FUSES (2) 20AMP (3) 25AMP
FP-113	FUSES (2) 20AMP (3) 30AMP
FP-114	FUSES (2) 20AMP (3) 35AMP
FP-115	FUSES (2) 20AMP (3) 40AMP
FP-116	FUSES (8) 20AMP
FP-117	FUSES (4) 20AMP (4) 35AMP
FP-118	FUSES (4) 20AMP (4) 30AMP
FP-119	FUSES (4) 20AMP (4) 50AMP
FP-120	FUSES (4) 20AMP (4) 60AMP
FP-121	FUSES (4) 20AMP (6) 15AMP
FP-122	FUSES (10) 20AMP
FP-123	FUSES (4) 20AMP (6) 25AMP
FP-124	FUSES (4) 20AMP (6) 30AMP
FP-125	FUSES (4) 20AMP (6) 35AMP
FP-126	FUSES (4) 20AMP (6) 40AMP

NOTE: FUSES 30AMP and Below - Class CC Type,
FUSES 35AMP and Above - Class J Type

NOTES

NOTES

PRODUCT SUPPORT RESOURCES

 <p>PRODUCT SUPPORT</p>	<p><i>web:</i> www.t-rp.com/ttm <i>email:</i> evaps@t-rp.com <i>call:</i> 1-844-893-3222 x520</p>
 <p>TROUBLESHOOTING</p>	<p><i>email:</i> troubleshooting@t-rp.com <i>call:</i> 1-844-893-3222 x529</p>
 <p>SERVICE PARTS</p>	<p><i>web:</i> www.t-rp.com/parts <i>email:</i> parts@t-rp.com <i>call:</i> 1-844-893-3222 x520</p>
 <p>WARRANTY</p>	<p><i>web:</i> www.t-rp.com/warranty <i>email:</i> warranty@t-rp.com <i>call:</i> 1-844-893-3222 x507</p>
 <p>ORDERS</p>	<p><i>email:</i> orders@t-rp.com <i>call:</i> 1-844-893-3222 x501</p>
 <p>SHIPPING</p>	<p><i>email:</i> shipping@t-rp.com <i>call:</i> 1-844-893-3222 x503</p>

HOW CAN WE HELP YOU? visit www.t-rp.com/contact



Trenton Refrigeration
Brantford, ON • Longview, TX
1-800-463-9517 info@t-rp.com www.t-rp.com

