




TEP Extended Profile Evaporator

60
Hz

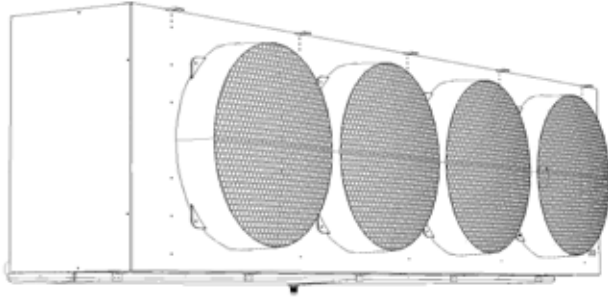

DEFROST KIT & FUSE PACKAGE SELECTION GUIDE

Bulletin T30-TEP-DFK

PRODUCT SUPPORT
 web: www.t-rp.com/tep
 email: evaps@t-rp.com
 call: 1-844-893-3222 x520

scan:

**For info on matched
Trenton condensing units,
visit
www.t-rp.com/cu**

Defrost Kit & Fuse Package Online Selection Tool:

www.t-rp.com/dfk

NOMENCLATURE

	TEP 115 M A - S2 A - T		
<p>Extended Profile Evaporator _____</p> <p>Nominal Capacity: _____ x 1000 @ 10°F TD, Btu/H (R404A)</p> <p>Application Range: _____ H = High Temp 7 FPI (25°F + Evap Temp) M = Medium Temp 6 FPI (10°F to 35°F Evap Temp) L = Low Temp 6 FPI (-40°F to 0°F Evap Temp) V = Low Temp 4 FPI (-40°F to 0°F Evap Temp) W = Fluid Air Cooler (with water or glycol)</p>	<div style="margin-left: 20px;"> <p>Motor: C = PSC Motors T = SmartSpeed ECM V = Variable Speed EC Motors (Requires a Controller)</p> <p>Generation: A = 1st</p> <p>Voltage: S2 = 208-230/1/60 T3 = 208-230/3/60 S4 = 460/1/60 T4 = 460/3/60 S5 = 575/1/60 T5 = 575/3/60</p> <p>Defrost: A = Air E = Electric T = 3 Pipe Hot Gas w/ Electric Heater Pan or Warm Fluid w/ Electric Heater Pan for Fluid Air Coolers H = 3 Pipe Hot Gas w/ Hot Gas Loop Pan G = Reverse Cycle w/ Electric Heater Pan R = Reverse Cycle w/ Hot Gas Loop Pan</p> </div>		

Medium Temperature, 6 FPI, with standard PSC Motors

TEMP	FPI	# of Fans	Model TEP	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
ME - MEDIUM TEMPERATURE	6	1	026ME-S2A-C	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			026ME-S4A-C	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			026ME-S5A-C	575/1/60	DFK-10	FP-008	DFK-12	FP-022
			026ME-T3A-C	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			026ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			026ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042
			031ME-S2A-C	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			031ME-S4A-C	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			031ME-S5A-C	575/1/60	DFK-10	FP-008	DFK-12	FP-022
			031ME-T3A-C	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			031ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			031ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042
		038ME-S2A-C	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		038ME-S4A-C	460/1/60	DFK-10	FP-101	DFK-12	FP-098	
		038ME-S5A-C	575/1/60	DFK-10	FP-100	DFK-12	FP-099	
		038ME-T3A-C	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		038ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		038ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042	
		052ME-S2A-C	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		052ME-S4A-C	460/1/60	DFK-10	FP-101	DFK-12	FP-098	
		052ME-S5A-C	575/1/60	DFK-10	FP-100	DFK-12	FP-099	
		052ME-T3A-C	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		052ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		052ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042	
		062ME-S2A-C	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		062ME-S4A-C	460/1/60	DFK-10	FP-101	DFK-12	FP-098	
		062ME-S5A-C	575/1/60	DFK-10	FP-100	DFK-12	FP-099	
		062ME-T3A-C	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		062ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		062ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042	
		079ME-S2A-C	208-230/1/60	DFK-25	FP-090	DFK-34	FP-088	
		079ME-S4A-C	460/1/60	DFK-15	FP-056	DFK-27	FP-049	
		079ME-S5A-C	575/1/60	DFK-10	FP-102	DFK-19	FP-097	
		079ME-T3A-C	208-230/3/60	DFK-16	FP-058	DFK-28	FP-052	
		079ME-T4A-C	460/3/60	DFK-14	FP-063	DFK-18	FP-070	
		079ME-T5A-C	575/3/60	DFK-14	FP-066	DFK-18	FP-073	
		093ME-S2A-C	208-230/1/60	DFK-25	FP-090	DFK-34	FP-088	
		093ME-S4A-C	460/1/60	DFK-15	FP-056	DFK-27	FP-049	
		093ME-S5A-C	575/1/60	DFK-10	FP-102	DFK-19	FP-097	
		093ME-T3A-C	208-230/3/60	DFK-16	FP-058	DFK-28	FP-052	
		093ME-T4A-C	460/3/60	DFK-14	FP-063	DFK-18	FP-070	
		093ME-T5A-C	575/3/60	DFK-14	FP-066	DFK-18	FP-073	
		115ME-S2A-C	208-230/1/60	DFK-25	FP-089	DFK-34	FP-087	
		115ME-S4A-C	460/1/60	DFK-15	FP-055	DFK-27	FP-048	
		115ME-S5A-C	575/1/60	DFK-15	FP-060	DFK-27	FP-067	
		115ME-T3A-C	208-230/3/60	DFK-16	FP-057	DFK-28	FP-051	
		115ME-T4A-C	460/3/60	DFK-14	FP-063	DFK-18	FP-070	
		115ME-T5A-C	575/3/60	DFK-14	FP-066	DFK-18	FP-073	
		4						

**TEP EXTENDED PROFILE EVAPORATORS
w/ Standard PSC Motors (cont'd)**

Medium Temperature, 6 FPI, with standard PSC Motors

TEMP	FPI	# of Fans	Model TEP	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
ME - MEDIUM TEMPERATURE	6	1	026ME-S2A-C	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			026ME-S4A-C	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			026ME-S5A-C	575/1/60	DFK-10	FP-008	DFK-12	FP-022
			026ME-T3A-C	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			026ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			026ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042
			031ME-S2A-C	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			031ME-S4A-C	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			031ME-S5A-C	575/1/60	DFK-10	FP-008	DFK-12	FP-022
			031ME-T3A-C	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			031ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			031ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042
		038ME-S2A-C	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		038ME-S4A-C	460/1/60	DFK-10	FP-101	DFK-12	FP-098	
		038ME-S5A-C	575/1/60	DFK-10	FP-100	DFK-12	FP-099	
		038ME-T3A-C	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		038ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		038ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042	
		052ME-S2A-C	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		052ME-S4A-C	460/1/60	DFK-10	FP-101	DFK-12	FP-098	
		052ME-S5A-C	575/1/60	DFK-10	FP-100	DFK-12	FP-099	
		052ME-T3A-C	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		052ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		052ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042	
		062ME-S2A-C	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		062ME-S4A-C	460/1/60	DFK-10	FP-101	DFK-12	FP-098	
		062ME-S5A-C	575/1/60	DFK-10	FP-100	DFK-12	FP-099	
		062ME-T3A-C	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		062ME-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		062ME-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042	
		079ME-S2A-C	208-230/1/60	DFK-25	FP-090	DFK-34	FP-088	
		079ME-S4A-C	460/1/60	DFK-15	FP-056	DFK-27	FP-049	
		079ME-S5A-C	575/1/60	DFK-10	FP-102	DFK-19	FP-097	
		079ME-T3A-C	208-230/3/60	DFK-16	FP-058	DFK-28	FP-052	
		079ME-T4A-C	460/3/60	DFK-14	FP-063	DFK-18	FP-070	
		079ME-T5A-C	575/3/60	DFK-14	FP-066	DFK-18	FP-073	
		093ME-S2A-C	208-230/1/60	DFK-25	FP-090	DFK-34	FP-088	
		093ME-S4A-C	460/1/60	DFK-15	FP-056	DFK-27	FP-049	
		093ME-S5A-C	575/1/60	DFK-10	FP-102	DFK-19	FP-097	
		093ME-T3A-C	208-230/3/60	DFK-16	FP-058	DFK-28	FP-052	
		093ME-T4A-C	460/3/60	DFK-14	FP-063	DFK-18	FP-070	
		093ME-T5A-C	575/3/60	DFK-14	FP-066	DFK-18	FP-073	
		115ME-S2A-C	208-230/1/60	DFK-25	FP-089	DFK-34	FP-087	
		115ME-S4A-C	460/1/60	DFK-15	FP-055	DFK-27	FP-048	
		115ME-S5A-C	575/1/60	DFK-15	FP-060	DFK-27	FP-067	
		115ME-T3A-C	208-230/3/60	DFK-16	FP-057	DFK-28	FP-051	
		115ME-T4A-C	460/3/60	DFK-14	FP-063	DFK-18	FP-070	
		115ME-T5A-C	575/3/60	DFK-14	FP-066	DFK-18	FP-073	

**TEP EXTENDED PROFILE EVAPORATORS
w/ Standard PSC Motors (cont'd)**

Low Temperature, 6 FPI, with standard PSC Motors

TEMP	FPI	# of Fans	Model TEP	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
LE - LOW TEMPERATURE	6	1	023LE-S2A-C	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			023LE-S4A-C	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			023LE-S5A-C	575/1/60	DFK-10	FP-008	DFK-12	FP-022
			023LE-T3A-C	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			023LE-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			023LE-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042
			028LE-S2A-C	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			028LE-S4A-C	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			028LE-S5A-C	575/1/60	DFK-10	FP-008	DFK-12	FP-022
			028LE-T3A-C	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			028LE-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			028LE-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042
		035LE-S2A-C	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		035LE-S4A-C	460/1/60	DFK-10	FP-101	DFK-12	FP-098	
		035LE-S5A-C	575/1/60	DFK-10	FP-100	DFK-12	FP-099	
		035LE-T3A-C	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		035LE-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		035LE-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042	
		047LE-S2A-C	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		047LE-S4A-C	460/1/60	DFK-10	FP-101	DFK-12	FP-098	
		047LE-S5A-C	575/1/60	DFK-10	FP-100	DFK-12	FP-099	
		047LE-T3A-C	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		047LE-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		047LE-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042	
		056LE-S2A-C	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		056LE-S4A-C	460/1/60	DFK-10	FP-101	DFK-12	FP-098	
		056LE-S5A-C	575/1/60	DFK-10	FP-100	DFK-12	FP-099	
		056LE-T3A-C	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		056LE-T4A-C	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		056LE-T5A-C	575/3/60	DFK-14	FP-041	DFK-18	FP-042	
		070LE-S2A-C	208-230/1/60	DFK-25	FP-090	DFK-34	FP-088	
		070LE-S4A-C	460/1/60	DFK-15	FP-056	DFK-27	FP-049	
		070LE-S5A-C	575/1/60	DFK-10	FP-102	DFK-19	FP-097	
		070LE-T3A-C	208-230/3/60	DFK-16	FP-058	DFK-28	FP-052	
		070LE-T4A-C	460/3/60	DFK-14	FP-063	DFK-18	FP-070	
		070LE-T5A-C	575/3/60	DFK-14	FP-066	DFK-18	FP-073	
		084LE-S2A-C	208-230/1/60	DFK-25	FP-090	DFK-34	FP-088	
		084LE-S4A-C	460/1/60	DFK-15	FP-056	DFK-27	FP-049	
		084LE-S5A-C	575/1/60	DFK-10	FP-102	DFK-19	FP-097	
		084LE-T3A-C	208-230/3/60	DFK-16	FP-058	DFK-28	FP-052	
		084LE-T4A-C	460/3/60	DFK-14	FP-063	DFK-18	FP-070	
		084LE-T5A-C	575/3/60	DFK-14	FP-066	DFK-18	FP-073	
		100LE-S2A-C	208-230/1/60	DFK-25	FP-089	DFK-34	FP-087	
		100LE-S4A-C	460/1/60	DFK-15	FP-055	DFK-27	FP-048	
		100LE-S5A-C	575/1/60	DFK-15	FP-060	DFK-27	FP-067	
		100LE-T3A-C	208-230/3/60	DFK-16	FP-057	DFK-28	FP-051	
		100LE-T4A-C	460/3/60	DFK-14	FP-063	DFK-18	FP-070	
		100LE-T5A-C	575/3/60	DFK-14	FP-066	DFK-18	FP-073	

Medium Temperature, 6 FPI, with optional SMARTSPEED™ EC Motors

TEMP	FPI	# of Fans	Model TEP	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
ME - MEDIUM TEMPERATURE	6	1	026ME-S2A-T	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			026ME-T3A-T	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			031ME-S2A-T	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
		031ME-T3A-T	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073	
		038ME-S2A-T	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		038ME-T3A-T	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
	2	052ME-S2A-T	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		052ME-T3A-T	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		062ME-S2A-T	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		062ME-T3A-T	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
	3	079ME-S2A-T	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093	
		079ME-T3A-T	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016	
		093ME-S2A-T	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093	
	4	093ME-T3A-T	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016	
		115ME-S2A-T	208-230/1/60	DFK-25	FP-092	DFK-36	FP-103	
		115ME-T3A-T	208-230/3/60	DFK-16	FP-023	DFK-30	FP-035	

Low Temperature, 6 FPI, with optional SMARTSPEED™ EC Motors

TEMP	FPI	# of Fans	Model TEP	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
LE - LOW TEMPERATURE	6	1	023LE-S2A-T	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			023LE-T3A-T	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			028LE-S2A-T	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
		028LE-T3A-T	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073	
		035LE-S2A-T	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		035LE-T3A-T	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
	2	047LE-S2A-T	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		047LE-T3A-T	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		056LE-S2A-T	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		056LE-T3A-T	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
	3	070LE-S2A-T	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093	
		070LE-T3A-T	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016	
		084LE-S2A-T	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093	
	4	084LE-T3A-T	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016	
		100LE-S2A-T	208-230/1/60	DFK-25	FP-092	DFK-36	FP-103	
		100LE-T3A-T	208-230/3/60	DFK-16	FP-023	DFK-30	FP-035	

Very Low Temperature, 4 FPI, with optional SMARTSPEED™ EC Motors

TEMP	FPI	# of Fans	Model TEP	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
VE - VERY LOW TEMPERATURE	6	1	020VE-S2A-T	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			020VE-T3A-T	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			024VE-S2A-T	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
		024VE-T3A-T	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073	
		030VE-S2A-T	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		030VE-T3A-T	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
	2	040VE-S2A-T	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		040VE-T3A-T	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
		048VE-S2A-T	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068	
		048VE-T3A-T	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053	
	3	060VE-S2A-T	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093	
		060VE-T3A-T	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016	
		072VE-S2A-T	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093	
	4	072VE-T3A-T	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016	
		088VE-S2A-T	208-230/1/60	DFK-25	FP-092	DFK-36	FP-103	
		088VE-T3A-T	208-230/3/60	DFK-16	FP-023	DFK-30	FP-035	

Medium Temperature, 6 FPI, with Variable Speed EC Motors

TEMP	FPI	# of Fans	Model TEP	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
ME - MEDIUM TEMPERATURE	6	1	026ME-S2A-V	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			026ME-S4A-V	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			026ME-T3A-V	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			026ME-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			031ME-S2A-V	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			031ME-S4A-V	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			031ME-T3A-V	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			031ME-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
		2	038ME-S2A-V	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068
			038ME-S4A-V	460/1/60	DFK-10	FP-101	DFK-12	FP-098
			038ME-T3A-V	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053
			038ME-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			052ME-S2A-V	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068
			052ME-S4A-V	460/1/60	DFK-10	FP-101	DFK-12	FP-098
			052ME-T3A-V	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053
			052ME-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
		3	062ME-S2A-V	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068
			062ME-S4A-V	460/1/60	DFK-10	FP-101	DFK-12	FP-098
			062ME-T3A-V	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053
			062ME-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			079ME-S2A-V	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093
			079ME-S4A-V	460/1/60	DFK-15	FP-056	DFK-27	FP-049
			079ME-T3A-V	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016
			079ME-T4A-V	460/3/60	DFK-14	FP-063	DFK-18	FP-070
		4	093ME-S2A-V	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093
			093ME-S4A-V	460/1/60	DFK-15	FP-056	DFK-27	FP-049
			093ME-T3A-V	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016
			093ME-T4A-V	460/3/60	DFK-14	FP-063	DFK-18	FP-070
115ME-S2A-V	208-230/1/60		DFK-25	FP-092	DFK-36	FP-103		
115ME-S4A-V	460/1/60		DFK-15	FP-055	DFK-27	FP-048		
115ME-T3A-V	208-230/3/60		DFK-16	FP-023	DFK-30	FP-035		
115ME-T4A-V	460/3/60		DFK-14	FP-063	DFK-18	FP-070		

Low Temperature, 6 FPI, with Variable Speed EC Motors

TEMP	FPI	# of Fans	Model TEP	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
LE - LOW TEMPERATURE	6	1	023LE-S2A-V	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			023LE-S4A-V	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			023LE-T3A-V	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			023LE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			028LE-S2A-V	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			028LE-S4A-V	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			028LE-T3A-V	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			028LE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
		2	035LE-S2A-V	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068
			035LE-S4A-V	460/1/60	DFK-10	FP-101	DFK-12	FP-098
			035LE-T3A-V	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053
			035LE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			047LE-S2A-V	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068
			047LE-S4A-V	460/1/60	DFK-10	FP-101	DFK-12	FP-098
			047LE-T3A-V	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053
			047LE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
		3	056LE-S2A-V	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068
			056LE-S4A-V	460/1/60	DFK-10	FP-101	DFK-12	FP-098
			056LE-T3A-V	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053
			056LE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			070LE-S2A-V	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093
			070LE-S4A-V	460/1/60	DFK-15	FP-056	DFK-27	FP-049
			070LE-T3A-V	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016
			070LE-T4A-V	460/3/60	DFK-14	FP-063	DFK-18	FP-070
		4	084LE-S2A-V	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093
			084LE-S4A-V	460/1/60	DFK-15	FP-056	DFK-27	FP-049
			084LE-T3A-V	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016
			084LE-T4A-V	460/3/60	DFK-14	FP-063	DFK-18	FP-070
			100LE-S2A-V	208-230/1/60	DFK-25	FP-092	DFK-36	FP-103
			100LE-S4A-V	460/1/60	DFK-15	FP-055	DFK-27	FP-048
			100LE-T3A-V	208-230/3/60	DFK-16	FP-023	DFK-30	FP-035
			100LE-T4A-V	460/3/60	DFK-14	FP-063	DFK-18	FP-070

**TEP EXTENDED PROFILE EVAPORATORS
with Variable Speed EC Motors (cont'd)**

Very Low Temperature, 4 FPI, with Variable Speed EC Motors

TEMP	FPI	# of Fans	Model TEP	Voltage	1 X EVAPORATOR		2 X EVAPORATOR	
					Defrost Kit	Fuse Package	Defrost Kit	Fuse Package
VE - VERY LOW TEMPERATURE	6	1	020VE-S2A-V	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			020VE-S4A-V	460/1/60	DFK-10	FP-008	DFK-12	FP-022
			020VE-T3A-V	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073
			020VE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			024VE-S2A-V	208-230/1/60	DFK-10	FP-102	DFK-19	FP-097
			024VE-S4A-V	460/1/60	DFK-10	FP-008	DFK-12	FP-022
		024VE-T3A-V	208-230/3/60	DFK-14	FP-066	DFK-18	FP-073	
		024VE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042	
		2	030VE-S2A-V	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068
			030VE-S4A-V	460/1/60	DFK-10	FP-101	DFK-12	FP-098
			030VE-T3A-V	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053
			030VE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			040VE-S2A-V	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068
			040VE-S4A-V	460/1/60	DFK-10	FP-101	DFK-12	FP-098
		3	040VE-T3A-V	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053
			040VE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
			048VE-S2A-V	208-230/1/60	DFK-15	FP-061	DFK-27	FP-068
			048VE-S4A-V	460/1/60	DFK-10	FP-101	DFK-12	FP-098
			048VE-T3A-V	208-230/3/60	DFK-14	FP-059	DFK-23	FP-053
			048VE-T4A-V	460/3/60	DFK-14	FP-041	DFK-18	FP-042
		4	060VE-S2A-V	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093
			060VE-S4A-V	460/1/60	DFK-15	FP-056	DFK-27	FP-049
			060VE-T3A-V	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016
			060VE-T4A-V	460/3/60	DFK-14	FP-063	DFK-18	FP-070
			072VE-S2A-V	208-230/1/60	DFK-25	FP-091	DFK-34	FP-093
			072VE-S4A-V	460/1/60	DFK-15	FP-056	DFK-27	FP-049
		4	072VE-T3A-V	208-230/3/60	DFK-16	FP-024	DFK-28	FP-016
			072VE-T4A-V	460/3/60	DFK-14	FP-063	DFK-18	FP-070
			088VE-S2A-V	208-230/1/60	DFK-25	FP-092	DFK-36	FP-103
			088VE-S4A-V	460/1/60	DFK-15	FP-055	DFK-27	FP-048
		4	088VE-T3A-V	208-230/3/60	DFK-16	FP-023	DFK-30	FP-035
			088VE-T4A-V	460/3/60	DFK-14	FP-063	DFK-18	FP-070

Defrost Kits

Number of Evaps	Kit Part Number	Description
1	DFK-01	Time Clock, HtrCont - 1x 40A (3P), FB 1x 30A (1P)
1	DFK-02	Time Clock, HtrCont - 1x 40A (3P), FB 1x 30A (2P)
1	DFK-03	Time Clock, HtrCont - 1x 40A (3P), FB 1x 30A (3P)
1	DFK-04	Time Clock, HtrCont - 1x 40A (3P), FB 1x 60A (2P)
2	DFK-05	Time Clock, HtrCont - 1x 40A (3P), FB 2x 30A (1P)
2	DFK-06	Time Clock, HtrCont - 1x 40A (3P), FB 2x 30A (2P)
2	DFK-07	Time Clock, HtrCont - 1x 40A (3P), FB 2x 30A (3P)
2	DFK-08	Time Clock, HtrCont - 1x 50A (3P), FB 2x 60A (2P)
2	DFK-09	Time Clock, HtrCont - 1x 50A (3P), FB 2x 30A (2P)
1	DFK-10	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P)
1	DFK-11	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P)
2	DFK-12	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 4x 30A (2P)
2	DFK-13	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 4x 30A (3P)
1	DFK-14	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 30A (3P)
1	DFK-15	Time Clock, HtrCont - 1x40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 60A (2P)
1	DFK-16	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 60A (3P)
1	DFK-17	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 1x 60A (3P)
2	DFK-18	Time Clock, HtrCont - 1x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 30A (3P)
2	DFK-19	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 4x 30A (2P)
2	DFK-20	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 4x 30A (3P)
1	DFK-21	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 1x 60A (2P)
1	DFK-22	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 1x 60A (3P)
2	DFK-23	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 30A (3P)
2	DFK-24	Time Clock, HtrCont - 1x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 2x 60A (3P)
1	DFK-25	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (2P), FB 2x 60A (2P)
1	DFK-26	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 2x 60A (3P)
2	DFK-27	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 60A (2P)
2	DFK-28	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 60A (3P)
2	DFK-29	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 2x 60A (3P)
2	DFK-30	Time Clock, HtrCont - 2x 40A (3P), FanCont - 1x 50A (3P), FB 2x 30A (2P), FB 2x 60A (3P)
1	DFK-31	Time Clock, HtrCont - 2x 50A (3P), FanCont - 1x 40A (3P), FB 1x 30A (3P), FB 2x 60A (3P)
2	DFK-32	Time Clock, HtrCont - 2x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 2x 60A (2P)
2	DFK-33	Time Clock, HtrCont - 2x 50A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 2x 60A (3P)
2	DFK-34	Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (2P), FB 4x 60A (2P)
2	DFK-35	Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 40A (3P), FB 2x 30A (3P), FB 4x 60A (3P)
2	DFK-36	Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 50A (3P), FB 2x 30A (2P), FB 4x 60A (2P)
2	DFK-37	Time Clock, HtrCont - 4x 40A (3P), FanCont - 1x 50A (3P), FB 2x 30A (3P), FB 4x 60A (3P)
2	DFK-38	Time Clock, HtrCont - 4x 50A (3P), FanCont - 1x 50A (3P), FB 2x 30A (3P), FB 4x 60A (3P)
1	DFK-39	Time Clock, HtrCont1 - 1x 40A (3P), HtrCont2 - 2x 50A (3P), FanCont - 1x 40A (3P), FB 4x 60A (3P)

NOTE: HtrCont = Heater Contactor, FanCont = Fan Contactor, FB = Fuse Block, (1P), (2P), (3P) = Number of Poles

Fuse Packages

Package Part Number	Description	Package Part Number	Description
FP-001	FUSES (1) 15AMP	FP-054	FUSES (3)15AMP (6) 35AMP
FP-002	FUSES (1) 20AMP	FP-055	FUSES (2) 15AMP (2) 45AMP
FP-003	FUSES (1) 25AMP	FP-056	FUSES (2) 15AMP (2) 40AMP
FP-004	FUSES (2) 15AMP	FP-057	FUSES (2) 20AMP (3) 50AMP
FP-006	FUSES (2) 20AMP	FP-058	FUSES (2) 15AMP (3) 45AMP
FP-007	FUSES (2) 25AMP	FP-059	FUSES (2) 15AMP (3) 30AMP
FP-008	FUSES (4) 15AMP	FP-060	FUSES (2) 15AMP (2) 35AMP
FP-010	FUSES (4) 25AMP	FP-061	FUSES (2) 15AMP (2) 50AMP
FP-012	FUSES (2) 35AMP	FP-062	FUSES (2) 15AMP (2) 60AMP
FP-013	FUSES (3) 15AMP	FP-063	FUSES (2) 15AMP (3) 25AMP
FP-014	FUSES (3) 20AMP	FP-064	FUSES (2) 15AMP (3) 35AMP
FP-015	FUSES (4) 20AMP	FP-065	FUSES (2) 15AMP (3) 40AMP
FP-016	FUSES (4) 20AMP (6) 45AMP	FP-066	FUSES (2) 15AMP (3) 20AMP
FP-017	FUSES (4) 35AMP	FP-067	FUSES (4) 15AMP (4) 35AMP
FP-018	FUSES (6) 15AMP	FP-068	FUSES (4) 15AMP (4) 50AMP
FP-019	FUSES (6) 20AMP	FP-069	FUSES (4) 15AMP (4) 60AMP
FP-020	FUSES (2) 30AMP	FP-070	FUSES (4) 15AMP (6) 25AMP
FP-021	FUSES (4) 30AMP	FP-071	FUSES (4) 15AMP (6) 35AMP
FP-022	FUSES (8) 15AMP	FP-072	FUSES (4) 15AMP (6) 40AMP
FP-023	FUSES (2) 25AMP (3) 50AMP	FP-073	FUSES (4) 15AMP (6) 20AMP
FP-024	FUSES (2) 20AMP (3) 45AMP	FP-074	FUSES (3) 20AMP (3) 60AMP
FP-025	FUSES (6) 20AMP (6) 60AMP	FP-075	FUSES (3) 20AMP (6) 35AMP
FP-026	FUSES (6) 15AMP (12) 40AMP	FP-076	FUSES (3) 25AMP (6) 50AMP
FP-027	FUSES (6) 15AMP (6) 40AMP	FP-077	FUSES (3) 35AMP (9) 45AMP
FP-028	FUSES (6) 20AMP (12) 40AMP	FP-078	FUSES (3) 15AMP (3) 35AMP
FP-029	FUSES (6)15AMP (6) 50AMP	FP-079	FUSES (3)15AMP (3) 45AMP
FP-030	FUSES (6) 15AMP (6) 45AMP	FP-080	FUSES (3) 15AMP (3) 50AMP
FP-031	FUSES (6) 15AMP (6) 35AMP	FP-081	FUSES (3) 20AMP (6) 40AMP
FP-032	FUSES (6) 15AMP (6) 30AMP	FP-082	FUSES (3) 15AMP (3) 40AMP
FP-033	FUSES (6) 25AMP (12) 50AMP	FP-083	FUSES (3) 15AMP (6) 40AMP
FP-034	FUSES (6) 20AMP (12) 35AMP	FP-084	FUSES (6) 15AMP (6) 60AMP
FP-035	FUSES (4) 25AMP (6) 50AMP	FP-085	FUSES (6) 15AMP (12) 35AMP
FP-036	FUSES (6) 25AMP (12) 60AMP	FP-086	FUSES (3) 35AMP (3) 45AMP (6) 60AMP
FP-037	FUSES (6) 20AMP (12) 60AMP	FP-087	FUSES (4) 20AMP (4) 40AMP (4) 50AMP
FP-038	FUSES (6) 20AMP (12) 50AMP	FP-088	FUSES (4) 15AMP (4) 35AMP (4) 40AMP
FP-039	FUSES (6) 20AMP (12) 45AMP	FP-089	FUSES (2) 20AMP (2) 40AMP (2) 50AMP
FP-040	FUSES (6) 15AMP (12) 45AMP	FP-090	FUSES (2) 15AMP (2) 35AMP (2) 40AMP
FP-041	FUSES (5) 15AMP	FP-091	FUSES (2) 20AMP (2) 35AMP (2) 40AMP
FP-042	FUSES (10) 15AMP	FP-092	FUSES (2) 25AMP (2) 40AMP (2) 50AMP
FP-043	FUSES (3) 25AMP (6) 60AMP	FP-093	FUSES (4) 20AMP (4) 35AMP (4) 40AMP
FP-044	FUSES (3) 20AMP (6) 60AMP	FP-094	FUSES (6) 15AMP (6) 25AMP
FP-045	FUSES (3) 20AMP (6) 50AMP	FP-095	FUSES (3) 15AMP (3) 25AMP
FP-046	FUSES (3) 25AMP (6) 45AMP	FP-096	FUSES (3) 15AMP (3) 30AMP
FP-047	FUSES (3) 15AMP (6) 45AMP	FP-097	FUSES (4) 15AMP (4) 30AMP
FP-048	FUSES (4) 15AMP (4) 45AMP	FP-098	FUSES (4) 15AMP (4) 25AMP
FP-049	FUSES (4) 15AMP (4) 40AMP	FP-099	FUSES (4) 15AMP (4) 20AMP
FP-050	FUSES (3) 15AMP (3) 60AMP	FP-100	FUSES (2) 15AMP (2) 20AMP
FP-051	FUSES (4) 20AMP (6) 50AMP	FP-101	FUSES (2) 15AMP (2) 25AMP
FP-052	FUSES (4) 15AMP (6) 45AMP	FP-102	FUSES (2) 15AMP (2) 30AMP
FP-053	FUSES (4) 15AMP (6) 30AMP	FP-103	FUSES (4) 25AMP (4) 40AMP (4) 50AMP

NOTE: FUSES 30AMP and Below - Class CC Type, FUSES 35AMP and Above - Class J Type



PRODUCT SUPPORT

web: www.t-rp.com/tep
email: evaps@t-rp.com
call: 1-844-893-3222 x520



TROUBLESHOOTING

email: troubleshooting@t-rp.com
call: 1-844-893-3222 x529



SERVICE PARTS

web: www.t-rp.com/parts
email: parts@t-rp.com
call: 1-844-893-3222 x520



WARRANTY

web: www.t-rp.com/warranty
email: warranty@t-rp.com
call: 1-844-893-3222 x501



ORDERS

email: orders@t-rp.com
call: 1-844-893-3222 x501



SHIPPING

email: shipping@t-rp.com
call: 1-844-893-3222 x503



Trenton Refrigeration
 Brantford, ON • Longview, TX
 1-800-463-9517 info@t-rp.com www.t-rp.com

